



## 4" HIGH THRUST SUBMERSIBLE MOTORS

**Single Phase:** 3 & 5 horsepower  
230 volts - 60 hertz; 220 volts - 50 hertz

**Three Phase:** 3 through 10 horsepower  
200, 230, 380, 575 volts - 60 hertz  
220 volts - 50 hertz; 460/380 volts - 60/50 hertz

### APPLICATION DATA

These motors are built for dependable operation in 4" diameter or larger water wells. Temperature and time rating continuous in 86°F (30°C) water at 1/4 ft/sec flow past motor. Rotation: single-phase, CCW facing shaft end; three-phase, electrically reversible.

For further information, refer to Franklin Electric's "Submersible Motors: Application, Installation, Maintenance Manual."

### CONTROL BOXES

- Franklin's single phase submersible Control Boxes are suitable for outdoor mounting with operation over temperature ranges of +14°F to +122°F.
- Start and run winding overloads protect the motor from failure due to abnormal operating conditions.
- Available in 3 and 5 HP ratings, the DELUXE Control Box incorporates a magnetic line contactor to eliminate the need for auxiliary contactors and heavy duty pressure switches.
- A heavy duty terminal strip with box type lugs makes it easy to install up to #2 AWG wire.
- Ground lugs provide a means of grounding the motor and Control Box to the power supply ground in compliance with NEC and other National and local codes.



### BASIC FEATURES

- Corrosion-Resistant Construction
- Stainless Steel Splined Shaft
- Hermetically-Sealed Windings
- Anti-Track Self-Healing Resin System
- Water Lubrication
- Filter Check Valve (Water Well)
- Kingsbury-type Thrust Bearing
- Pressure Equalizing Diaphragm
- Sand Fighter Slinger
- Built-In Lightning Arrestors (single-phase)
- Removable "Water-Bloc" lead installed in 60 Hz and dual frequency rated water well motors. Consult factory for additional leads.
- NEMA Mounting Dimensions
- UL 778 Recognized (North American Voltages)
- CSA C22.2 #108 Certified


### SPECIAL FEATURES

- **Ni-Resist:** Special construction option for some salt water and high pH applications.
- **316 Stainless Steel:** Special construction option for acid, low pH, and seawater applications.
- **Oil Stripper:** Special construction option for secondary oil recovery wells, geothermal, or other applications with high ambient temperatures. Consult Factory for construction details.
- **World Wide Adaptability:** All standard voltage and hertz ratings are offered. Contact Franklin Electric for availability.

**WARNINGS:** Serious or fatal electrical shock or fire hazard may result from failure to follow the instructions for proper installation and use which accompany this equipment. Do not use motor in swimming areas.

# 4" HIGH THRUST SUBMERSIBLE MOTORS

## DIMENSIONS

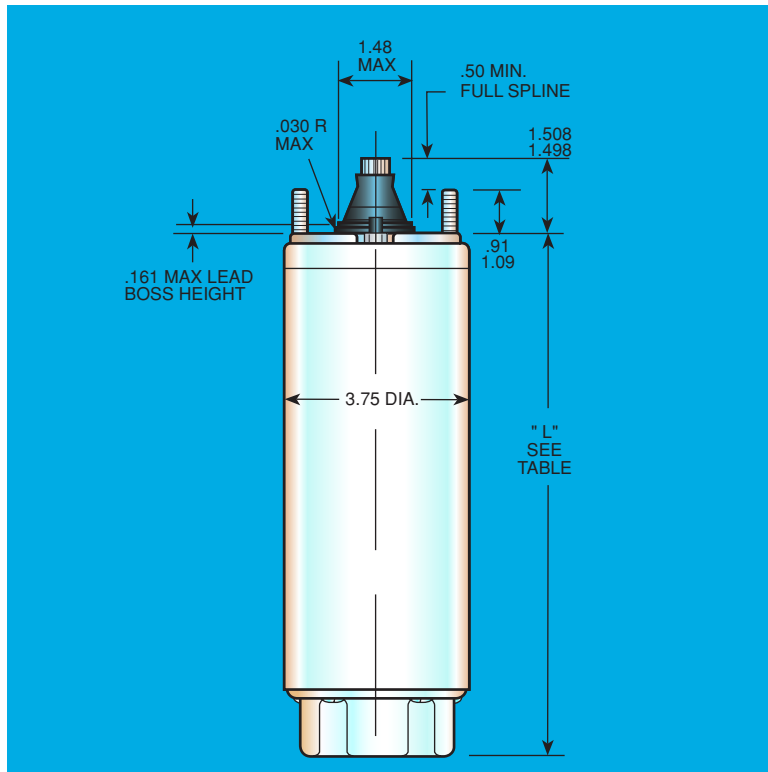

## AVAILABILITY

### Single-Phase Capacitor start, capacitor run (Control Box required)

Hp	kW	"L" Dimension		Shipping Weight	
		in	lbs	kgs	
3	2.2	22.2	55	25.0	
5	3.7	28.2	70	31.8	

### Three-Phase (Special control required)

Hp	kW	"L" Dimension		Shipping Weight	
		in	lbs	kgs	
3	2.2	19.2	42	19.1	
5	3.7	22.2	55	25.0	
7 1/2	5.5	28.2	70	31.8	
10	7.5	43.9	75	34.1	

60 Hz - 3,450 RPM  
50 Hz - 2,875 RPM

## CONSTRUCTION MATERIALS

Component	Environment Type		
	Standard Water Well	Saltwater (Ni-Resist) ③	Chemical (316 STNLS) ③
1. Castings	303 SS Over Iron	Ni-Resist Type 1B	316 SS
2. Stator Shell	301 SS	316 SS	316 SS
3. Stator Ends	Low Carbon Steel	316 SS	316 SS
4. Shaft Extension	17-4 SS	17-4 SS	17-4 SS
5. Fasteners	300 Series SS	316 SS	316 SS
6. Seal Cover	Acetal	316 SS	316 SS
7. Seal	Nitrile Rubber Lip Seal	Viton, Carbon, Ceramic Face Seal	Viton, Carbon, Ceramic Face Seal
8. Diaphragm	Nitrile Rubber	Type 200 Hydrin	Type 200 Hydrin
9. Diaphragm Plate	304 SS	304 SS	304 SS
10. Diaphragm Spring	302 SS	302 SS	302 SS
11. Diaphragm Cover	304 SS	316 SS	316 SS
12. Slinger	Nitrile Rubber	Nitrile Rubber	Nitrile Rubber
13. Lead Wire (or Cable)	XLPE ①	②	②
14. Lead Potting	Epoxy	Epoxy ②	Epoxy ②
15. Lead Jam Nut	303 SS	316 SS ②	316 SS ②
16. Filter	Delrin & Polyester	316 SS Plug	316 SS Plug

① Removable type, factory-installed in 60 Hz and dual frequency rated water well motors. Consult catalog for additional leads.

② Ordered separately

③ Not available in 10 Hp

Specifications subject to change without notice. Contact Franklin Electric if current material types are required for bid specifications.



**Franklin Electric**

400 E. Spring Street, Bluffton, Indiana 46714  
Tel: 260.824.2900 Fax: 260.824.2909  
www.franklin-electric.com